Description


RK is a range of straight flow in-line centrifugal duct fans designed for rectangular ducts. They are compact, high capacity fans which operate quietly and can be fitted in any position.RK fans have forward curved impellers and are designed to cope with high pressure and long duct. The fans have a rigid housing made from galvanised steel. They are moisture proof and approved for use in outdoor environments.The motors are maintenance free and protected from overheating by thermo contacts. The impellers only require occasional cleaning. This cleaning is made easy with the RKrsquo;s swing out design. All fans are supplied fully wired and ready to fit in a sealed installation unit.The fans are not intended for transporting grinding dust, soot or similar.RK fans come innbsp;8 sizes, which gives a total of 24 different capacities.




Technical data


Parameter	Value	Unit
Voltage	230	V
Phase	1	~
Frequency	50	Hz
Power	0.32	kW
Current	1.45	A
R.p.m.	13	r/s
Max. temperature of transported air	65	°C
Max. temperature of transported air when speed-controlled	65	°C
Sound pressure level at 3 m	48.9	dB(A)
Length	562	mm
Width	543	mm
Height	364	mm
Weight	19	kg
Enclosure class, motor	44	IP
Insulation class, motor	F	
Capacitor	5	μF
Duct connection	500x300	
	mm	

Diagrams

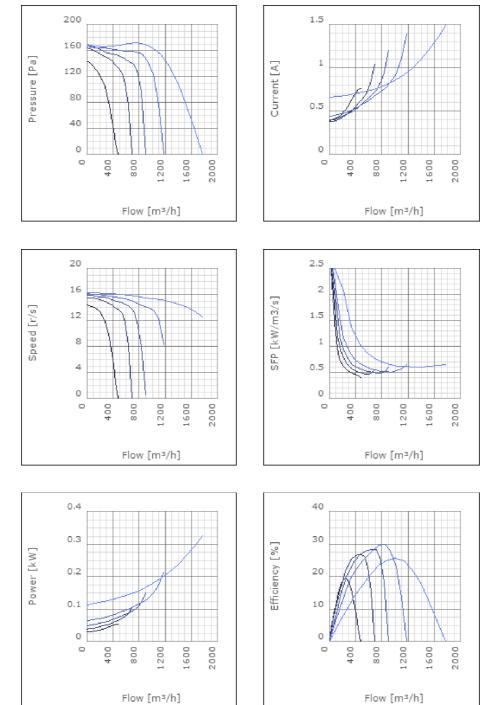

Sound

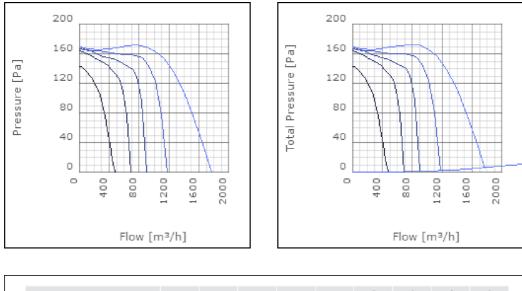


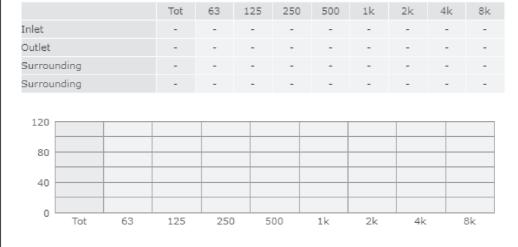


Parameter

Distance: Propagation type: Equivalent absorption area: 3.000 Hemi-spherical 20.00

Dimensions

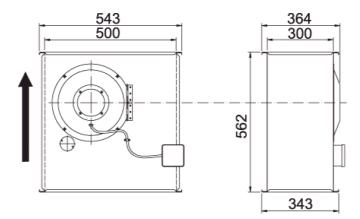

Wiring diagram



Accessories

ETFV-94A FRE 6 VRDE 3 VRS 2,0 VRTE 3

Electrical accessories

FLR 500x300 DS 500x300 RKC-Kit 315 (500x300) LDR 500x300

