

#### Description

RK is a range of straight flow in-line centrifugal duct fans designed for rectangular ducts. They are compact, high capacity fans which operate quietly and can be fitted in any position.RK fans have forward curved impellers and are designed to cope with high pressure and long duct. The fans have a rigid housing made from galvanised steel. They are moisture proof and approved for use in outdoor environments.The motors are maintenance free and protected from overheating by thermo contacts. The impellers only require occasional cleaning. This cleaning is made easy with the RKṛsquo;s swing out design. All fans are supplied fully wired and ready to fit in a sealed installation unit.The fans are not intended for transporting grinding dust, soot or similar.RK fans come innbsp;8 sizes, which gives a total of 24 different capacities.




#### Technical data


| Parameter   | Value         | Unit  |
|---|---------------|-------|
| Voltage   | 230           | V     |
| Phase   | 1             | ~     |
| Frequency   | 50            | Hz    |
| Power   | 1.23          | kW    |
| Current   | 5.83          | Α     |
| R.p.m.  | 17            | r/s   |
| Max. temperature of transported air                       | 40            | °C    |
| Max. temperature of transported air when speed-controlled | 40            | °C    |
| Sound pressure level at 3 m                               | 57.2          | dB(A) |
| Length  | 642           | mm    |
| Width   | 643           | mm    |
| Height  | 364           | mm    |
| Weight  | 32            | kg    |
| Enclosure class, motor                                    | 44            | IP    |
| Insulation class, motor                                   | F             |       |
| Capacitor   | 20            | μF    |
| Duct connection   | 600x300<br>mm |       |


www.ostberg.com Page 1/4





# Diagrams
















www.ostberg.com Page 2/4



## Sound

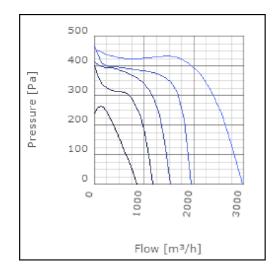

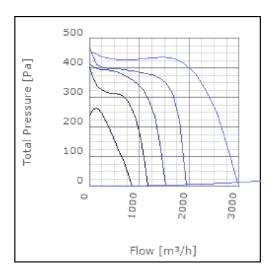

|             | Tot | 63 | 125 | 250 | 500 | 1k | 2k | 4k | 8k |
|-------------|-----|----|-----|-----|-----|----|----|----|----|
| Inlet       | -   | -  | -   | -   | -   | -  | -  | -  | -  |
| Outlet      | -   | -  | -   | -   | -   | -  | -  | -  | -  |
| Surrounding | -   | -  | -   | -   | -   | -  | -  | -  | -  |
| Surrounding | -   | -  | -   | -   | -   | -  | -  | -  | -  |
| 120         |     |    |     |     |     |    |    |    |    |
| 80          |     |    |     |     |     |    |    |    |    |
|             |     |    |     |     |     |    |    |    |    |

### **Parameter**

Distance: 3.000

Propagation type: Hemi-spherical


Equivalent absorption 20.00

area:

www.ostberg.com Page 3/4




### **Dimensions**

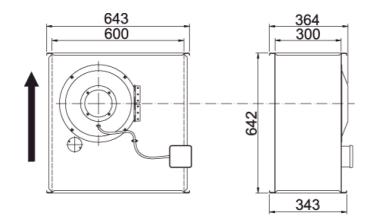

# Wiring diagram

4040005



- M = Fan Motor
- M1) = Fan Motor
- M2 = Fan Motor
- (M3) = Rotor Motor
- 1 = Yellow/Green
- = Black
- A = Blue
- A = Brown
- White (TW)
- 6 = Orang
- 7 = Grey
- 3 = Red
- 9 = Green
- 10= Violet

### Accessories

FRE 6

VRDE 7

VRTE 7

## Electrical accessories

FLR 600x300 DS 600x300

RKC-Kit 315 (600x300)

LDR 600x300

www.ostberg.com Page 4/4