Description


RKB is a range of straight flow in-line centrifugal duct fans designed for rectangular ducts. They are compact, high capacity fans which operate quietly and can be fitted in any position.RKB fans have backward curved impellers and are designed to cope with high pressure and long duct. The fans have a rigid housing made from galvanised steel. They are moisture proof and approved for use in outdoor environments. The motors are maintenance free and protected from overheating by thermo contacts. The impellers only require occasional cleaning. This cleaning is made easy with the RKBrsquo;s swing out design. All fans are supplied fully wired and ready to fit in a sealed installation unit. The fans are not intended for transporting grinding dust, soot or similar. RKB fans come in 25 sizes.




Technical data

Parameter	Value	Unit
Voltage	230	V
Phase	1	~
Frequency	50	Hz
Power	0.41	kW
Current	2.11	A
R.p.m.	23	r/s
Max. temperature of transported air	40	°C
Max. temperature of transported air when speed-controlled	40	°C
Sound pressure level at 3 m	57	dB(A)
Length	717	mm
Width	643	mm
Height	395	mm
Weight	29.5	kg
Enclosure class, motor	44	IP
Insulation class, motor	F	
Capacitor	12	μF
Duct connection	600x350	
	mm	

Diagrams

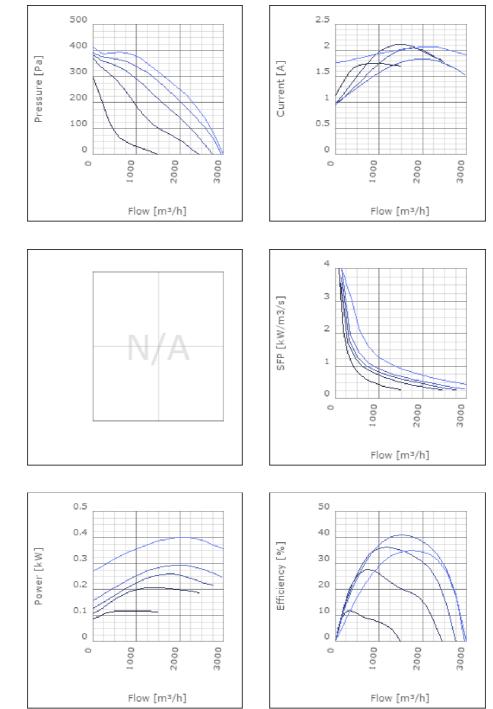

Sound

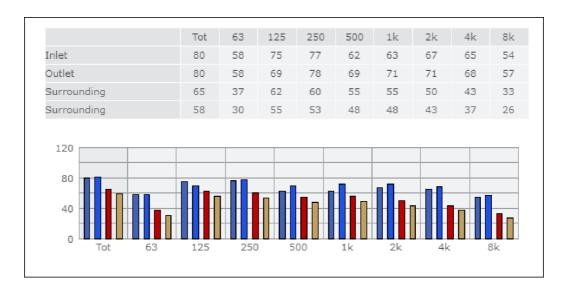

Parameter

Distance:	3.000
Propagation type:	Hemi-spherical
Equivalent absorption	20.00
area:	


Checked point

Flow	1676.259m³/h
Static pressure	296Pa


Working point

Flow	1677.276m³/h
Static Pressure	296Pa
Power	0.39kW
Speed	Or/s
Current	2.05A
Voltage	230V
Efficiency	34.995%
SFP	0kW/m3/s

Dimensions

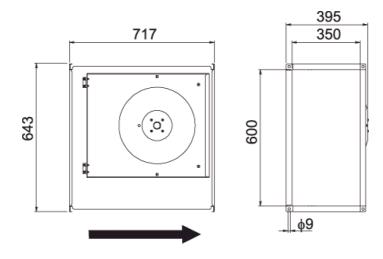

Wiring diagram



Accessories

ETFV-94A FRE 6 VRDE 3 VRS 4,0 VRTE 3

Electrical accessories

FLR 600x350 DS 600x350 LDR 600x350

