

## Description

RKBI is an insulated centrifugal duct fan with connections for rectangular ducts. The fan have a rigid housing of galvanised steel and are compact with high capacity. With the 50 mm high quality insulation it operates quiet and the surface of the insulation is easy to clean.RKBI is available in 16 capacities. The backward curved impeller gives a better efficiency over a very big working area than the forward curved impeller. The fan is designed to cope with high pressures i.e. long ducts with a minimum of noise. The motor is speed-controllable from 0-100% and maintenance-free, why the only service required is cleaning the impeller.Motor with impeller can be swung out for inspection and cleaning (swing-out). The RKBI fan is supplied fully-wired and ready to fit in a sealed installation unit. It is moisture-proof and approved for use in warm or cold environments. All fans are fitted with a built-in thermal protector.




#### Technical data


Parameter	Value	Unit
Voltage	400	V
Phase	3	~
Frequency	50	Hz
Power	0.78	kW
Current	1.55	Α
R.p.m.	23	r/s
Max. temperature of transported air	60	°C
Max. temperature of transported air when speed-controlled	55	°C
Sound pressure level at 3 m	51	dB(A)
Length	817	mm
Width	807	mm
Height	549	mm
Weight	62.5	kg
Enclosure class, motor	44	IP
Insulation class, motor	F	
Duct connection	700x400	
	mm	


www.ostberg.com Page 1/4





# Diagrams















www.ostberg.com Page 2/4



### Sound

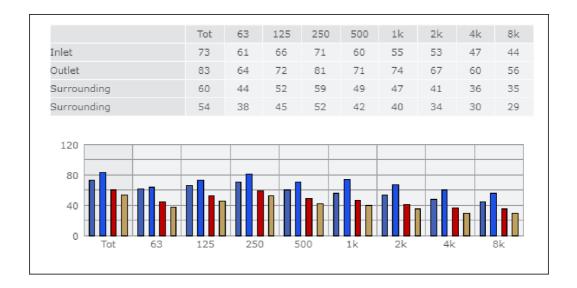

### **Parameter**

Distance: 3.000

Propagation type: Hemi-spherical

Equivalent absorption 20.00

area:

## Checked point

Flow 3140.288m3/h Flow 3141.437m<sup>3</sup>/h Static pressure 429Pa Static Pressure 430Pa Power 0.77kW Speed 0r/s Current 1.55A Voltage 400V

**Working point** 

Efficiency


SFP 0kW/m3/s


48.483%

www.ostberg.com Page 3/4




# **Dimensions**

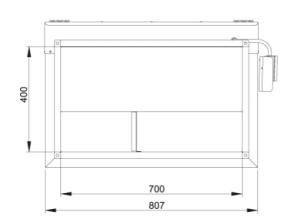

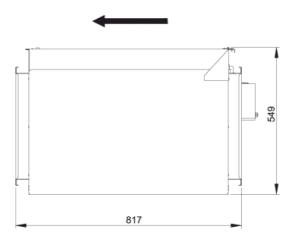

# Wiring diagram



- M = Fan Motor
- M1) = Fan Motor
- M2 = Fan Motor
- M3 = Rotor Motor
- 1 = Yellow/Green
- 2 = Black
- E) = Blue
- 4 = Brown
- = White (TW)
- 6 = Orange
- 7 = Grey
- 🖸= Red
- g = Green
- 10= Violet

## Accessories

VRDT 2 VRTT 2

## Electrical accessories

FLR 700x400 DS 700x400 LDR 700x400

www.ostberg.com Page 4/4