

### Description

IRE is a range of insulated in-line centrifugal duct fans. They provide high pressure with low sound level. The IRE fans have good sound and fire insulation qualities provided by a 50mm pad of mineral wool. The high quality ball bearing mounted external rotor motors are maintenance free. They can be speed controlled from 0-100% by voltage variation. All motors are protected by approved thermo contacts. All 3-phase motors have ready fitted thermo contact leads for alarm functions etc. The fans have a strong galvanized steel housing incorporating a swing out design of the fan motor and impeller for easy cleaning and inspection.




#### Technical data


Parameter	Value	Unit
Voltage	230	V
Phase	1	~
Frequency	50	Hz
Power	0.54	kW
Current	2.3	Α
R.p.m.	1850	r/m
Max. temperature of transported air	45	°C
Max. temperature of transported air when speed-controlled	45	°C
Sound pressure level at 3 m	39	dB(A)
Length	692	mm
Width	638	mm
Height	490	mm
Weight	31	kg
Enclosure class, motor	44	IP
Insulation class, motor	F	
Capacitor	5	μF
Duct connection	ø400 mm	


www.ostberg.com Page 1/4





# Diagrams
















www.ostberg.com Page 2/4

### Sound

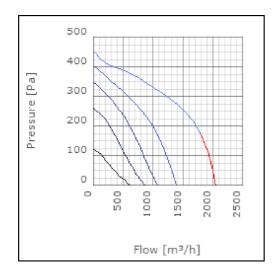

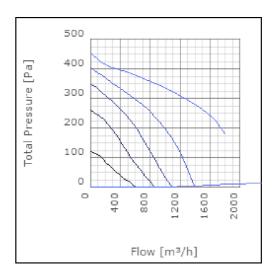

	Tot	63	125	250	500	1k	2k	4k	8k
Inlet	-	-	-	-	-	-	-	-	-
Outlet	-	-	-	-	-	-	-	-	-
Surrounding	-	-	-	-	-	-	-	-	-
Surrounding	-	-	-	-	-	-	-	-	-
120									
80									

#### **Parameter**

Distance: 3.000

Propagation type: Hemi-spherical


Equivalent absorption 20.00


area:

www.ostberg.com Page 3/4




#### **Dimensions**

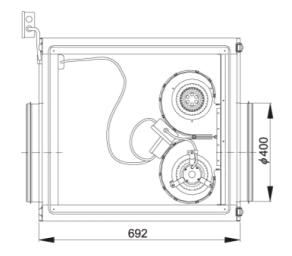

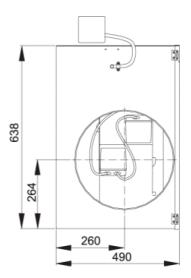

## Wiring diagram

404002

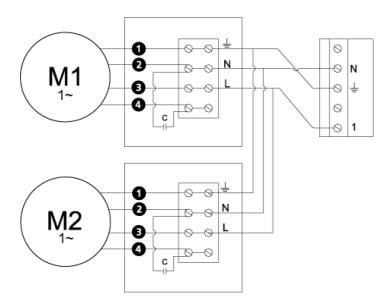

- M = Fan Motor
- M1) = Fan Motor
- M2 = Fan Motor
- (M3) = Rotor Moto
- = Yellow/Green
- 2 = Black
- 3 = Blue
- 🚹 = Brown
- = White (TW)
- 6 = Orange
- 🕡= Grey
- 3 = Red
- 9 = Green
- 10= Violet

#### Accessories

ETFV-94A

FRE 6

VRDE 3

VRS 4,0

VRTE 3

#### Electrical accessories

FLF 400

FLK 400

**BSV 400**