

Description

RK is a range of straight flow in-line centrifugal duct fans designed for rectangular ducts. They are compact, high capacity fans which operate quietly and can be fitted in any position.RK fans have forward curved impellers and are designed to cope with high pressure and long duct. The fans have a rigid housing made from galvanised steel. They are moisture proof and approved for use in outdoor environments.The motors are maintenance free and protected from overheating by thermo contacts. The impellers only require occasional cleaning. This cleaning is made easy with the RKṛsquo;s swing out design. All fans are supplied fully wired and ready to fit in a sealed installation unit.The fans are not intended for transporting grinding dust, soot or similar.RK fans come innbsp;8 sizes, which gives a total of 24 different capacities.




Technical data


Parameter	Value	Unit
Voltage	400	V
Phase	3	~
Frequency	50	Hz
Power	1.54	kW
Current	3.15	Α
R.p.m.	14	r/s
Max. temperature of transported air	40	°C
Max. temperature of transported air when speed-controlled	40	°C
Sound pressure level at 3 m	61.1	dB(A)
Length	787	mm
Width	743	mm
Height	468	mm
Weight	54	kg
Enclosure class, motor	44	IP
Insulation class, motor	F	
Duct connection	700x400 mm	


www.ostberg.com Page 1/4





Diagrams
















www.ostberg.com Page 2/4



Sound





	Tot	63	125	250	500	1k	2k	4k	8k
Inlet	-	-	-	-	-	-	-	-	-
Outlet	-	-	-	-	-	-	-	-	-
Surrounding	-	-	-	-	-	-	-	-	-
Surrounding	-	-	-	-	-	-	-	-	-
120									
120									

Parameter

Distance: 3.000

Propagation type: Hemi-spherical


Equivalent absorption 20.00

area:


www.ostberg.com Page 3/4



Dimensions

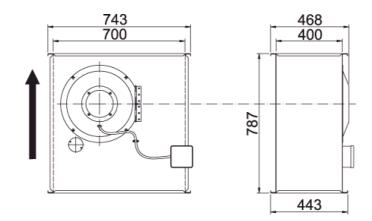

Wiring diagram



- M= Fan Motor
- (M1) = Fan Motor
- Š --
- M3 = Rotor Motor
- A Vollow/Groom
- = Black
- E = Blue
- = Brown
- = White (TW)
- 6 = Orange
- 7 = Grey
- 🕄 = Red
- g = Green
- 10 = Violet

Accessories

VRDT 4

VRTT 4

Electrical accessories

FLR 700x400 DS 700x400 RKC-Kit 400 (700x400)

LDR 700x400

www.ostberg.com Page 4/4